

Die Grinders



**WX-50-240S (Side Exhaust)
Die Grinder**
**WX-50-241S (Front Exhaust)
Die Grinder**
- 24,000 RPM
- Safety Throttle Lever



**WX-50-240N (Side Exhaust)
Die Grinder**
**WX-50-241N (Front Exhaust)
Die Grinder**
- 24,000 RPM
- Built-in Comfort Grip



**WX-50-250R (Side Exhaust)
Die Grinder**
- 24,000 RPM
- Ring Throttle
- Built-in Comfort Grip



**WX-50-250N (Side Exhaust)
Die Grinder**
- 24,000 RPM
- Built-in Comfort Grip



**WX-50-280R (Side Exhaust)
Die Grinder**
**WX-50-281R (Front Exhaust)
Die Grinder**
- 24,000 RPM
- Ring Throttle



**WX-50-250S (Side Exhaust)
Die Grinder**
- 24,000 RPM
- Safety Throttle Lever
- Built-in Comfort Grip



**WX-50-290S (Side Exhaust)
Die Grinder**
**WX-50-291S (Front Exhaust)
Die Grinder**
- 24,000 RPM
- Safety Throttle Lever



**WX-50-290N (Side Exhaust)
Die Grinder**
**WX-50-291N (Front Exhaust)
Die Grinder**
- 24,000 RPM



Model No.	Throttle Type	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Power HP (Watt)	Grinding Wheel Size Inch (mm)	Burr Head Size Inch (mm)	Collet Size Inch (mm)	Max Air Cons. (m/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-50-240N WX-50-241N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (172)	1.16 (0.53)	83
WX-50-240S WX-50-241S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (172)	1.21 (0.55)	83
WX-50-250N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	7.6 (194)	1.65 (0.72)	83
WX-50-250R	Ring	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	8 (203)	1.67 (0.76)	83
WX-50-250S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	7.6 (194)	1.65 (0.72)	83
WX-50-280R WX-50-281R	Ring	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.7 (170)	1.23 (0.56)	83
WX-50-290N WX-50-291N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.32 (0.6)	83
WX-50-290S WX-50-291S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	6.8 (173)	1.36 (0.62)	83

Die Grinders

Die Grinders



**WX-5E-260N (Side Exhaust)
Extended Die Grinder**
**WX-5E-261N (Front Exhaust)
Extended Die Grinder**
- Steel Housing



**WX-5E-260R (Side Exhaust)
Extended Die Grinder**
**WX-5E-261R (Front Exhaust)
Extended Die Grinder**
- Ring Throttle
- Steel Housing




WX-5E-5229
1/4\"/>



**WX-5E-260S (Side Exhaust)
Extended Die Grinder**
**WX-5E-261S (Front Exhaust)
Extended Die Grinder**
- Steel Housing



WX-5E-5300
1/4\"/>

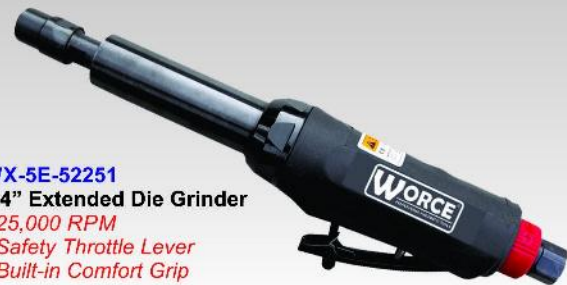

WX-5E-52251
1/4\"/>



WX-5E-52252
1/4\"/>



WX-5E-5227
1/4\"/>

Model No.	Throttle Type	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Power HP (Watt)	Grinding Wheel Size Inch (mm)	Burr Head Size Inch (mm)	Collet Size Inch (mm)	Max Air Cons. (m/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-5E-260R WX-5E-261R	Ring	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.7 (297)	1.98 (0.9)	83
WX-5E-260N WX-5E-261N	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.8 (300)	2.2 (0.98)	83
WX-5E-260S WX-5E-261S	Lever	24,000	1/4"	3/8 (10)	0.35 (257)	1 (25)	1/2 (13)	1/4 (6)	0.4	11.8 (300)	2.2 (1)	83
WX-5E-5227	Lever	25,000	1/4"	3/8 (10)	-	-	-	1/4 (6) or 1/8 (3)	0.4	10 (256)	1.5 (0.7)	77
WX-5E-5229	Lever	25,000	1/4"	3/8 (10)	-	-	-	1/4 (6) or 1/8 (3)	0.4	10 (256)	1.5 (0.7)	77
WX-5E-5300	Lever	25,000	1/4"	3/8 (10)	-	-	-	1/4 (6) or 1/8 (3)	0.4	10 (256)	1.5 (0.7)	77
WX-5E-52251	Lever	25,000	1/4"	3/8 (10)	-	-	-	1/4 (6) or 1/8 (3)	0.4	10-1/4 (258)	1.5 (0.7)	79
WX-5E-52252	Lever	25,000	1/4"	3/8 (10)	-	-	-	1/4 (6) or 1/8 (3)	0.4	10-1/4 (258)	1.5 (0.7)	79

Die Grinders

Die Grinders



WX-5E-5200
Extended Die Grinder - Industrial
 - 22,000 RPM
 - Safety Throttle Lever
 - Erickson Collet



WX-5F-3011B
1/4\"/>



WX-5F-3011Y
1/4\"/>



WX-5F-3011X
1/4\"/>



WX-5F-5100
1/4\"/>



WX-5F-3011Z
1/4\"/>



WX-6F-3011X
Low Speed Tire Buffer
 - 2,500 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-6F-3011B
Low Speed Tire Buffer
 - 2,500 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever

Model No.	Collet (or Chuck) Size Inch (mm)	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (mm)	Noise Level dB (A)
WX-5E-5200	1/4 (6)	22,000	1/4"	3/8 (10)	5.3 (150)	13 (330)	2.6 (1.2)	-
WX-5F-3011B	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	13-11/16 (348)	3 (1.4)	79
WX-5F-3011X	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	13-11/16 (348)	3 (1.4)	79
WX-5F-3011Y	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	13-11/16 (348)	3 (1.4)	79
WX-5F-3011Z	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	13-11/16 (348)	3 (1.4)	79
WX-5F-5100	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	13-11/16 (348)	3 (1.4)	79
WX-6F-3011B	-	2,500	1/4"	3/8 (10)	4 (113)	10 (254)	2.4 (1.1)	79
WX-6F-3011X	-	2,500	1/4"	3/8 (10)	4 (113)	10 (254)	2.4 (1.1)	79

Die Grinders

Die Grinders



WX-6F-3011Z
Low Speed Tire Buffer
 - 2,500 RPM
 - Safety Throttle Lever
 - Erickson Collet



WX-6F-3011Y
Low Speed Tire Buffer
 - 2,500 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-51-3011B
1/4\"/>



WX-50-5200
Die Grinder - Industrial
 - 22,000 RPM
 - Safety Throttle Lever
 - Erickson Collet



WX-51-5100
1/4\"/>



WX-51-3011X
1/4\"/>



WX-53-5300
1/4\"/>



WX-54-3011Y
1/4\"/>

Model No.	Collet (or Chuck) Size Inch (mm)	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (mm)	Noise Level dB (A)
WX-6F-3011Y	-	2,500	1/4"	3/8 (10)	4 (113)	10 (254)	2.4 (1.1)	79
WX-6F-3011Z	-	2,500	1/4"	3/8 (10)	4 (113)	10 (254)	2.4 (1.1)	79
WX-50-5200	1/4 (6)	22,000	1/4"	3/8 (10)	5.3 (150)	7-7/8 (200)	1.8 (0.8)	-
WX-51-3011B	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	7-3/8 (188)	1.5 (0.7)	79
WX-51-3011X	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	7-3/8 (188)	1.5 (0.7)	79
WX-51-5100	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	7-3/8 (188)	1.5 (0.7)	79
WX-54-3011Y	1/4 (6)	20,000	1/4"	3/8 (10)	4 (113)	13-11/16 (348)	3.0 (1.4)	79
WX-53-5300	1/4 (6) & 1/8 (3)	25,000	1/4"	3/8 (10)	4 (113)	6-1/4 (159)	0.9 (0.4)	77

Die Grinders

Die Grinders



WX-53-52251
1/4" Mini Die Grinder
 - 25,000 RPM
 - Safety Throttle Lever
 - Built-in Comfort Grip



WX-53-5530
Industrial Die Grinder
 - 32,000 RPM
 - Steel Motor Housing
 - Safety Lever



WX-572P
1/4" Die Grinder
 - 22,000 RPM
 - Composite Motor Housing
 - Safety Throttle Lever
 - Full Size Square Handle



WX-53-52252
1/4" Mini Die Grinder
 - 25,000 RPM
 - Safety Throttle Lever
 - Built-in Comfort Grip



WX-512
1/4" Die Grinder
 - 22,000 RPM



WX-501C
1/4" Die Grinder
 - 22,000 RPM
 - Front Exhaust
 - Built-in Comfort Grip



WX-545
1/4" Hand Die Grinder
 - 4,500 RPM
 - Full-Cage Gear Design



WX-532
1/4" Mini Die Grinder
 - 25,000 RPM
 - Safety Throttle Lever

Model No.	Collet (or Chuck) Size Inch (mm)	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (mm)	Noise Level dB (A)
WX-53-5530	1/4 (6)	32,000	1/4"	3/8 (10)	4 (113)	7 (180)	1.6 (0.73)	-
WX-53-52251	1/4 (6) or 1/8 (3)	25,000	1/4"	3/8 (10)	4 (113)	6-7/16 (163)	0.9 (0.4)	79
WX-53-52252	1/4 (6) or 1/8 (3)	25,000	1/4"	3/8 (10)	4 (113)	6-7/16 (163)	0.9 (0.4)	79
WX-501C	1/4 (6)	22,000	1/4"	3/8 (10)	4 (113)	6-1/2 (165)	1.1 (0.5)	-
WX-512	1/4 (6)	22,000	1/4"	3/8 (10)	4 (113)	6-3/4 (172)	1.3 (0.6)	-
WX-532	1/4 (6)	25,000	1/4"	3/8 (10)	4 (113)	6 (153)	0.8 (0.4)	-
WX-545	1/4 (6)	4,500	1/4"	3/8 (10)	4 (113)	8 (203)	1.4 (0.6)	-
WX-572P	1/4 (6) & 1/8 (3)	22,000	1/4"	3/8 (10)	4 (113)	6-11/16 (170)	1.2 (0.5)	83

Die Grinders

Die Grinders



WX-552
1/4" Mini Die Grinder
- 25,000 RPM
- Front Exhaust



WX-582
1/4" Die Grinder - Full Size
- 22,000 RPM



WX-562
1/4" Mini Angle Grinder
- 22,000 RPM
- Front Exhaust



WX-522
1/4" Angle Die Grinder
- 22,000 RPM
- Full-Cage Gear Design



WX-582F
1/4" Extended Die Grinder
- 22,000 RPM



WX-585
1/4" Die Grinder
- 4,500 RPM
- Full-Cage Gear Design



WX-532E
1/4" Extended Mini Die Grinder
- 25,000 RPM



WX-512F
1/4" Extended Die Grinder
- 22,000 RPM

Model No.	Collet (or Chuck) Size Inch (mm)	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (mm)
WX-512F	1/4 (6)	22,000	1/4"	3/8 (10)	4 (113)	13-3/16 (335)	2.6 (1.2)
WX-532E	1/4 (6)	25,000	1/4"	3/8 (10)	4 (113)	9-3/4 (246)	1.3 (0.6)
WX-522	1/4 (6)	22,000	1/4"	3/8 (10)	4 (113)	6-1/8 (155)	1.1 (0.5)
WX-552	1/4 (6)	25,000	1/4"	3/8 (10)	4 (113)	4-3/4 (121)	0.6 (0.3)
WX-562	1/4 (6)	22,000	1/4"	3/8 (10)	4 (113)	4-13/16 (122)	1 (0.4)
WX-582	1/4 (6)	22,000	1/4"	3/8 (10)	4 (113)	6-3/4 (171)	1.3 (0.6)
WX-582F	1/4 (6)	22,000	1/4"	3/8 (10)	4 (113)	13 (330)	2.2 (1.0)
WX-585	1/4 (6)	4,500	1/4"	3/8 (10)	4 (113)	8-3/8 (212)	1.8 (0.8)

Die Grinders

Die Grinders



WX-52-5300
1/4" 90° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-52-5227
1/4" 90° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-52-52251
1/4" 90° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-52-5229
1/4" 90° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-55-5300
1/4" 115° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-52-52252
1/4" 90° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-55-52252
1/4" 115° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever



WX-55-52251
1/4" 115° Angle Die Grinder
 - 20,000 RPM
 - Built-in Comfort Grip
 - Safety Throttle Lever

Model No.	Collet (or Chuck) Size Inch (mm)	Free Speed (RPM)	Air Inlet	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (mm)	Noise Level dB (A)
WX-52-5227	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	6-1/2 (165)	1.1 (0.5)	77
WX-52-5229	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	6-1/2 (165)	1.1 (0.5)	77
WX-52-5300	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	6-1/2 (165)	1.1 (0.5)	77
WX-52-52251	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	6-1/2 (166)	1.1 (0.5)	79
WX-52-52252	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	6-1/2 (166)	1.1 (0.5)	79
WX-55-5300	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	7-3/4 (197)	1.1 (0.5)	77
WX-55-52251	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	7-15/16 (200)	1.1 (0.5)	79
WX-55-52252	1/4 (6) or 1/8 (3)	20,000	1/4"	3/8 (10)	4 (113)	7-15/16 (200)	1.1 (0.5)	79

Die Grinders

WX-53-5522

Industrial Die Grinder

- 35,000 RPM
- 0.4 HP
- Rear Exhaust
- Low Vibration
- Low Noise 75 dB (A)



WX-5001

Heavy Duty Straight Die Grinder

- 12,000 RPM
- 0.5 HP
- Safety Lever
- Rear Exhaust



Model No.	Free Speed (RPM)	Collet Size Inch (mm)	Air Inlet	Hose Size ID Inch (mm)	Power HP (Watt)	Air Consumption CFM (L/Min)	Hose Length Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)
WX-5001	12,000	1/4 (6)	1/4"	3/8 (10)	0.5 (0.37)	4 (113)	-	12-1/2 (317.5)	2.9 (1.3)
WX-53-5522	35,000	1/4 (6)	1/4"	3/8 (10)	0.4 (0.3)	4 (113)	29.5 (750)	7.5 (200)	1.3 (0.57)

Angle Grinders



WX-5B-6410R
 4" Angle Grinder
WX-5C-6410R
 4-1/2" Angle Grinder
WX-5D-6410R
 5" Angle Grinder



Features :

- With Speed Governor
- Accept 0.8 mm - 6 mm Disc
- Built-in Comfort
- Rear Exhaust
- 1.1 HP

WX-5B-6410
 4" Angle Grinder
WX-5C-6410
 4-1/2" Angle Grinder
WX-5D-6410
 5" Angle Grinder



Model No.	Free Speed (RPM)	Power Watt (HP)	Capacity Wheel Inch (mm)	Spindle Thread	Air Inlet (NPT)	Length Inch (mm)	Average Air Consumption CFN (L/Min)	Weight Lbs (Kg)	Noise Level dB (A)
WX-5B-6410/38	12,000	820 (1.1)	4 (100)	3/8"-24	3/8"	9-1/2 (240)	4 (113)	4.4 (2)	90
WX-5C-6410/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	3/8"	9-1/2 (240)	4 (113)	4.4 (2)	90
WX-5C-6410/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	3/8"	9-1/2 (240)	4 (113)	4.4 (2)	90
WX-5D-6410/38	12,000	820 (1.1)	5 (125)	3/8"-24	3/8"	9-1/2 (240)	4 (113)	4.4 (2)	90
WX-5D-6410/58	12,000	820 (1.1)	5 (125)	5/8"-11	3/8"	9-1/2 (240)	4 (113)	4.4 (2)	90
WX-5D-6410/M14	12,000	820 (1.1)	5 (125)	M14x2.0	3/8"	9-1/2 (240)	4 (113)	4.4 (2)	90
WX-5B-6410R/38	12,000	820 (1.1)	4 (100)	3/8"-24	3/8"	9-1/4 (234)	4 (113)	4.4 (2)	90
WX-5C-6410R/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	3/8"	9-1/4 (234)	4 (113)	4.4 (2)	90
WX-5C-6410R/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	3/8"	9-1/4 (234)	4 (113)	4.4 (2)	90
WX-5D-6410R/38	12,000	820 (1.1)	5 (125)	3/8"-24	3/8"	9-1/4 (234)	4 (113)	4.4 (2)	90
WX-5D-6410R/58	12,000	820 (1.1)	5 (125)	5/8"-11	3/8"	9-1/4 (234)	4 (113)	4.4 (2)	90
WX-5D-6410R/M14	12,000	820 (1.1)	5 (125)	M14x2.0	3/8"	9-1/4 (234)	4 (113)	4.4 (2)	90

Angle Grinders



Features :

- With Speed Governor
- 9 Position Adjustable Swivel Guard
- Accept 0.8mm - 6mm Disc
- Built-in Comfort Grip
- Side Exhaust
- Rear Exhaust
- Vibration Reduced Handle
- 1.1 HP Motor

- WX-5B-6410S**
4" Angle Grinder
- WX-5C-6410S**
4-1/2" Angle Grinder
- WX-5D-6410S**
5" Angle Grinder



WX-45-405157-11SUB
Exhaust Hose Assembly (Optional)

► 9 Position Adjustable Swivel Guard



#5D-619256
Standard Side Handle



#5G-619753
Vibration Reduced Handle (Optional)



QN-38
Quick Nut
(3/8"-24UNF)



QN-M14
Quick Nut
(M14x2.0P)



QN-58
Quick Nut
(5/8"-11UNC)

* Suitable for 4-1/2" & 5" Angle Grinders Only (Optional)

Model No.	Free Speed (RPM)	Power Watt (HP)	Capacity Wheel Inch (mm)	Spindle Thread	Air Inlet (NPT)	Length Inch (mm)	Average Air Consumption CFN (L/Min)	Weight Lbs (Kg)	Noise Level dB (A)
WX-5B-6410S/38	12,000	820 (1.1)	4 (100)	3/8"-24	3/8"	9-7/8 (249)	4 (113)	4.4 (2)	90
WX-5C-6410S/58	12,000	820 (1.1)	4-1/2 (115)	5/8"-11	3/8"	9-7/8 (249)	4 (113)	4.4 (2)	90
WX-5C-6410S/M14	12,000	820 (1.1)	4-1/2 (115)	M14x2.0	3/8"	9-7/8 (249)	4 (113)	4.4 (2)	90
WX-5D-6410S/38	12,000	820 (1.1)	5 (125)	3/8"-24	3/8"	9-7/8 (249)	4 (113)	4.4 (2)	90
WX-5D-6410S/58	12,000	820 (1.1)	5 (125)	5/8"-11	3/8"	9-7/8 (249)	4 (113)	4.4 (2)	90
WX-5D-6410S/M14	12,000	820 (1.1)	5 (125)	M14x2.0	3/8"	9-7/8 (249)	4 (113)	4.4 (2)	90

Angle Grinders

Angle Grinders



- WX-5B-6410R**
4" Angle Grinder
- WX-5C-6410R**
4-1/2" Angle Grinder
- WX-5D-6410R**
5" Angle Grinder
- Roll Type
- With Speed Governor
- 1.1 HP Motor



- WX-5B-6410**
4" Angle Grinder
- WX-5C-6410**
4-1/2" Angle Grinder
- WX-5D-6410**
5" Angle Grinder
- Lever Type
- With Speed Governor
- 1.1 HP Motor



- WX-5D-6412**
5" Angle Grinder
- With Speed Governor
- Lever Type
- 12,000 RPM
- 1.6 HP



Model No.	Free Speed (RPM)	Power Watt (HP)	Spindle Thread	Capacity Wheel Inch (mm)	Air Inlet (NPT)	Length Inch (mm)	Average Air Consumption CFN (L/Min)	Weight Lbs (Kg)
WX-5D-6412	12,000	1,193 (1.6)	5/8"-11	5x1/4x7/8(125x6x22.2)	3/8"	11-3/4 (296)	4.7 (133)	4.6 (2.1)
WX-5B-6410/38	12,000	820 (1.1)	3/8"-11	4 (100)	3/8"	9-1/2 (240)	4 (113)	4.4 (2)
WX-5C-6410/58	12,000	820 (1.1)	5/8"-11	4-1/2 (115)	3/8"	9-1/2 (240)	4 (113)	4.4 (2)
WX-5C-6410/M14	12,000	820 (1.1)	M14x2.0	4-1/2 (115)	3/8"	9-1/2 (240)	4 (113)	4.4 (2)
WX-5D-6410/38	12,000	820 (1.1)	3/8"-11	5 (125)	3/8"	9-1/2 (240)	4 (113)	4.4 (2)
WX-5D-6410/58	12,000	820 (1.1)	5/8"-11	5 (125)	3/8"	9-1/2 (240)	4 (113)	4.4 (2)
WX-5D-6410/M14	12,000	820 (1.1)	M14x2.0	5 (125)	3/8"	9-1/2 (240)	4 (113)	4.4 (2)
WX-5B-6410R/38	12,000	820 (1.1)	3/8"-11	4 (100)	3/8"	9-1/4 (234)	4 (113)	4.4 (2)
WX-5C-6410R/58	12,000	820 (1.1)	5/8"-11	4-1/2 (115)	3/8"	9-1/4 (234)	4 (113)	4.4 (2)
WX-5C-6410R/M14	12,000	820 (1.1)	M14x2.0	4-1/2 (115)	3/8"	9-1/4 (234)	4 (113)	4.4 (2)
WX-5D-6410R/38	12,000	820 (1.1)	3/8"-11	5 (125)	3/8"	9-1/4 (234)	4 (113)	4.4 (2)
WX-5D-6410R/58	12,000	820 (1.1)	5/8"-11	5 (125)	3/8"	9-1/4 (234)	4 (113)	4.4 (2)
WX-5D-6410R/M14	12,000	820 (1.1)	M14x2.0	5 (125)	3/8"	9-1/4 (234)	4 (113)	4.4 (2)

Angle Grinders



WX-5D-6412R
5" Angle Grinder

- Roll Type
- With Speed Governor
- 1.6 HP



WX-5G-6413
7" Angle Grinder

- With Speed Governor
- Lever Type
- 2.2 HP



WX-5G-6413R
7" Angle Grinder

- With Speed Governor
- Roll Type
- 2.2 HP



Model No.	Free Speed (RPM)	Power Watt (HP)	Air Inlet (NPT)	Capacity Wheel Inch (mm)	Max Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-5D-6412R	12,000	1,193 (1.6)	3/8"	5x1/4x7/8 (125x6x22.2)	4.7 (133)	9-1/4 (232)	4.4 (2)
WX-5G-6413	8,400	1,641 (2.2)	3/8"	7x1/4x7/8 (180x6x22.2)	6.9 (195)	12-3/4 (323)	6.6 (3)
WX-5G-6413R	8,400	1,641 (2.2)	3/8"	7x1/4x7/8 (180x6x22.2)	6.9 (195)	10-7/8 (277)	6.6 (3)

Angle Grinders



Features :

- With Speed Governor
- Lever Type
- Side Exhaust
- Side Handle



WX-5G-6423
7" Angle Grinder
- 2.2 HP
- 8,400 RPM



WX-5B-6422
4" Angle Grinder
- 12,000 RPM
- 1.6 HP

WX-5C-6422
4-1/2" Angle Grinder
- 12,000 RPM
- 1.6 HP

WX-5D-6422
5" Angle Grinder
- 12,000 RPM
- 1.6 HP

Model No.	Free Speed (RPM)	Power Watt (HP)	Abrasive Capacity	Air Inlet (NPT)	Max Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Spindle Thread
WX-5B-6422/38	12,000	1,193 (1.6)	4"	3/8"	4.7 (133)	10-7/8 (277)	4 (1.8)	3/8"-24
WX-5C-6422/58	12,000	1,193 (1.6)	4-1/2"	3/8"	4.7 (133)	10-7/8 (277)	4.2 (1.9)	5/8"-11
WX-5D-6422/58	12,000	1,193 (1.6)	5"	3/8"	4.7 (133)	10-7/8 (277)	4.2 (1.9)	5/8"-11
WX-5D-6422/M14	12,000	1,193 (1.6)	5"	3/8"	4.7 (133)	10-7/8 (277)	4.2 (1.9)	M14x2.0
WX-5G-6422/M14	8,400	1,641 (2.2)	7"	3/8"	6.9 (195)	12-3/4 (323)	7.5 (3.4)	3/8"-24
WX-5G-6423/M14	8,400	1,641 (2.2)	7"	3/8"	6.9 (195)	12-3/4 (323)	7.5 (3.4)	M14x2.0

Angle Grinders

Angle Grinders



Features :

- Spindle Lock Allows Quick and Easy Disc Change
- Push Button Lock off Lever
- Spindle Thread : 5/8"-11 or M14
- Rubber Comfort Grip
- Front Exhaust
- Vibration Reduced Handle

WX-5G-6197

7" Angle Grinder

- Roll Type
- Bigger Guard (USA)
- 1.3 HP



Spindle Lock



Front Exhaust



Safety Lever

WX-5G-6198

7" Angle Grinder

- Roll Type
- Smaller Guard (Europe)
- 1.3 HP



Accessories (Optional) :



#5D-619256
Standard Side Handle



#5G-619753
Vibration Reduced Handle (Optional)

Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Air Inlet (NPT)	Spindle Thread	Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Hose Size ID Inch (mm)
WX-5G-6197/58	8,500	7 (175)	3/8"	5/8"-11	6 (170)	13-3/4 (350)	7.7 (3.5)	3/8 (10)
WX-5G-6197/M14	8,500	7 (175)	3/8"	M14x2.0	6 (170)	13-3/4 (350)	7.7 (3.5)	3/8 (10)
WX-5G-6198/58	8,500	7 (175)	3/8"	5/8"-11	4 (113)	14 (355)	7.3 (3.3)	3/8 (10)

Angle Grinders



Features :

- With Speed Governor
- 9 Position Adjustable Swivel Guard
(for WX-5B-6414S, WX-5C-6414S,
WX-5D-6414S)
- Rear Exhaust
- 0.88 HP Motor
- Lightweight 3.5 Lbs (1.6 Kgs)

- WX-5B-6414S
4" Angle Grinder
- WX-5C-6414S
4-1/2" Angle Grinder
- WX-5D-6414S
5" Angle Grinder



- WX-5B-6414
4" Angle Grinder
- WX-5C-6414
4-1/2" Angle Grinder
- WX-5D-6414
5" Angle Grinder



Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Spindle Thread	Hose Size ID Inch (mm)	Air Inlet (NPT)	Length Inch (mm)	Average Air Consumption CFN (L/Min)	Weight Lbs (Kg)
WX-5B-6414S/38	12,000	4 (100)	3/8"-24	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5B-6414S/M10	12,000	4 (100)	M10x1.5	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5C-6414S/38	12,000	4-1/2 (115)	3/8"-24	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5C-6414S/M14	12,000	4-1/2 (115)	M14x2.0	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5C-6414S/58	12,000	4-1/2 (115)	5/8"-11	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5D-6414S/38	12,000	5 (125)	3/8"-24	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5D-6414S/M14	12,000	5 (125)	M14x2.0	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5D-6414S/58	12,000	5 (125)	5/8"-11	3/8 (10)	1/4"	10 (253)	3.7 (105)	3.5 (1.6)
WX-5B-6414/38	12,000	4 (100)	3/8"-34	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)
WX-5B-6414/M10	12,000	4 (100)	M10x1.5	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)
WX-5C-6414/38	12,000	4-1/2 (115)	3/8"-24	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)
WX-5C-6414/M14	12,000	4-1/2 (115)	M14x2.0	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)
WX-5C-6414/58	12,000	4-1/2 (115)	5/8"-11	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)
WX-5D-6414/38	12,000	5 (125)	3/8"-24	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)
WX-5D-6414/M14	12,000	5 (125)	M14x2.0	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)
WX-5D-6414/58	12,000	5 (125)	5/8"-11	3/8 (10)	1/4"	9-3/4 (247)	3.7 (105)	3.5 (1.6)

Angle Grinders



Features :

- With Speed Governor
- 9 Position Adjustable Swivel Guard
- Accept 0.8 mm-6 mm Disc
- Built-in Comfort Grip
- Side Handle
- Spindle Lock Allows Quick and Easy Disc Change
- Rear Exhaust
- Vibration Reduced Handle
- Low Noise 83 dB (A)
- 0.9 HP Motor



► Vibration Reduced Handle



► Swivel Guard Adjustable

WX-5B-6192AS
4" Angle Grinder
WX-5C-6192AS
4-1/2" Angle Grinder
WX-5D-6192AS
5" Angle Grinder



► 9 Position Adjustable Swivel Guard



#5D-619256
Standard Side Handle

#5G-619753
Vibration Reduced Handle (Optional)

EH-6192SUB
Exhaust Hose Assembly (Optional)

QN-38
Quick Nut (3/8"-24UNF)

QN-M14
Quick Nut (M14x2.0P)

QN-58
Quick Nut (5/8"-11UNC)

* Suitable for 4-1/2" & 5" Angle Grinders Only (Optional)

Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Hose Size ID Inch (mm)	Spindle Thread	Air Inlet (NPT)	Length Inch (mm)	Average Air Consumption CFN (L/Min)	Weight Lbs (Kg)	Noise Level dB (A)
WX-5B-6192AS/38	12,000	4 (100)	3/8 (10)	3/8"-24	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5B-6192AS/M10	12,000	4 (100)	3/8 (10)	M10x1.5	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5C-6192AS/58	12,000	4-1/2 (115)	3/8 (10)	5/8"-11	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5C-6192AS/M14	12,000	4-1/2 (115)	3/8 (10)	M14x2.0	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5C-6192AS/38	12,000	4-1/2 (115)	3/8 (10)	3/8"-24	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5D-6192AS/58	12,000	5 (125)	3/8 (10)	5/8"-11	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5D-6192AS/M14	12,000	5 (125)	3/8 (10)	M14x2.0	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5D-6192AS/38	12,000	5 (125)	3/8 (10)	3/8"-24	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83

Angle Grinders



Features :

- With Speed Governor
- 9 Position Adjustable Swivel Guard
- Accept 0.8 mm-6 mm Disc
- Composite Motor Housing
- Side Handle
- Spindle Lock Allows Quick and Easy Disc Change
- Rear Exhaust
- Vibration Reduced Handle
- Low Noise 83 dB (A)
- 0.9 HP Motor



► Spindle Lock



► Swivel Guard Adjustable

WX-5B-6192PS
4" Angle Grinder
WX-5C-6192PS
4-1/2" Angle Grinder
WX-5D-6192PS
5" Angle Grinder



► 9 Position Adjustable Swivel Guard



#5D-619256
Standard Side Handle

#5G-619753
Vibration Reduced Handle (Optional)

EH-6192SUB
Exhaust Hose Assembly (Optional)

QN-38
Quick Nut (3/8"-24UNF)

QN-M14
Quick Nut (M14x2.0P)

QN-58
Quick Nut (5/8"-11UNC)

* Suitable for 4-1/2" & 5" Angle Grinders Only (Optional)

Model No.	Free Speed (RPM)	Grinding Wheel Size Inch (mm)	Hose Size ID Inch (mm)	Spindle Thread	Air Inlet (NPT)	Length Inch (mm)	Average Air Consumption CFN (L/Min)	Weight Lbs (Kg)	Noise Level dB (A)
WX-5B-6192PS/38	12,000	4 (100)	3/8 (10)	3/8"-24	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5B-6192PS/M10	12,000	4 (100)	3/8 (10)	M10x1.5	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5C-6192PS/58	12,000	4-1/2 (115)	3/8 (10)	5/8"-11	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5C-6192PS/M14	12,000	4-1/2 (115)	3/8 (10)	M14x2.0	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5C-6192PS/38	12,000	4-1/2 (115)	3/8 (10)	3/8"-24	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5D-6192PS/58	12,000	5 (125)	3/8 (10)	5/8"-11	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5D-6192PS/M14	12,000	5 (125)	3/8 (10)	M14x2.0	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83
WX-5D-6192PS/38	12,000	5 (125)	3/8 (10)	3/8"-24	1/4"	9-3/8 (238)	4 (113)	4.4 (2)	83

Angle Grinders



WX-6190
4-1/2" Angle Grinder & Sander



WX-619
4" Angle Grinder
WX-6195
5" Angle Grinder
- Lever Type



WX-5J-5423
2" Mini Angle Grinder
- Special Spindle
- Comfort Grip
- Safety Throttle Lever



WX-5J-5420
2" Mini Angle Grinder
- Roll Type
- Rubber Comfort Grip
- Safety Throttle Lever



Model No.	Free Speed (RPM)	Hose Size Inch (mm)	Capacity Wheel Inch (mm)	Air Inlet (NPT)	Max Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-5J-5420	20,000	3/8 (10)	2 (50)	1/4"	4 (113)	5 (129)	1.1 (0.5)
WX-5J-5423	20,000	3/8 (10)	2 (50)	1/4"	4 (113)	5-1/4 (133)	1.1 (0.5)
WX-619	12,000	3/8 (10)	4 (102)	1/4"	6 (170)	9 (229)	4 (1.8)
WX-6190	12,000	3/8 (10)	4-1/2 (115)	1/4"	6 (170)	8-3/4 (223)	4 (1.8)
WX-6195	12,000	3/8 (10)	5 (127)	1/4"	6 (170)	9 (229)	4.2 (1.9)

Vertical Grinders



WX-5F-400C
6" Vertical Grinder
 - Safety Lever
 - 4.0 HP



WX-5F-300C
6" Vertical Grinder
 - Safety Lever
 - 3.0 HP



WX-5G-400V
7" Vertical Grinder
 - Safety Lever
 - 4.0 HP



WX-5G-300V
7" Vertical Grinder
 - Safety Lever
 - 3.0 HP



WX-5H-400V
9" Vertical Grinder
 - Safety Lever
 - 4.0 HP



WX-5H-300V
9" Vertical Grinder
 - Safety Lever
 - 3.0 HP

Model No.	Free Speed (RPM)	Power Watt (HP)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-5F-300C	6,000	2,238 (3)	6 (150) Cup	5/8"-11	1/2"	1/2 (13)	12 (340)	12-3/4 (325)	10.4 (4.7)
WX-5F-400C	6,000	2,984 (4)	6 (150) Cup	5/8"-11	1/2"	1/2 (13)	16 (453)	13 (328)	12.1 (5.5)
WX-5G-300V	6,000	2,238 (3)	7 (180) Type27	5/8"-11	1/2"	1/2 (13)	12 (340)	11-3/4 (300)	9.7 (4.4)
WX-5G-400V	6,000	2,984 (4)	7 (180) Type27	5/8"-11	1/2"	1/2 (13)	16 (453)	12 (304)	11.5 (5.2)
WX-5H-300V	6,000	2,238 (3)	9 (225) Type27	5/8"-11	1/2"	1/2 (13)	12 (340)	13-1/8 (333)	10.4 (4.7)
WX-5H-400V	6,000	2,984 (4)	9 (225) Type27	5/8"-11	1/2"	1/2 (13)	16 (453)	13-1/4 (337)	12.1 (5.5)

Vertical Grinders

Vertical Grinders



WX-5F-421C
6" Vertical Grinder
- Safety Lever
- 4.0 HP



WX-5F-321C
6" Vertical Grinder
- Safety Lever
- 3.0 HP



WX-5G-421V
7" Vertical Grinder
- Safety Lever
- 4.0 HP



WX-5G-321V
7" Vertical Grinder
- Safety Lever
- 3.0 HP



WX-5H-421V
9" Vertical Grinder
- Safety Lever
- 4.0 HP



WX-5H-321V
9" Vertical Grinder
- Safety Lever
- 3.0 HP

Model No.	Free Speed (RPM)	Power Watt (HP)	Grinding Wheel Size Inch (mm)	Spindle Thread	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-5F-321C	6,000	2,238 (3)	6 (150) Cup	5/8"-11	1/2"	1/2 (13)	3 (85)	12-1/2 (317)	10.4 (4.7)
WX-5F-421C	6,000	2,984 (4)	6 (150) Cup	5/8"-11	1/2"	1/2 (13)	4.5 (127.5)	12-1/2 (318)	12.3 (5.6)
WX-5G-321V	6,000	2,238 (3)	7 (180) Type27	5/8"-11	1/2"	1/2 (13)	3 (85)	11-1/2 (291)	9.7 (4.4)
WX-5G-421V	6,000	2,984 (4)	7 (180) Type27	5/8"-11	1/2"	1/2 (13)	4.5 (127.5)	11-5/8 (295)	11.7 (5.3)
WX-5H-321V	6,000	2,238 (3)	9 (225) Type27	5/8"-11	1/2"	1/2 (13)	3 (85)	12-7/8 (327)	10.4 (4.7)
WX-5H-421V	6,000	2,984 (4)	9 (225) Type27	5/8"-11	1/2"	1/2 (13)	4.5 (127.5)	13 (332)	12.3 (5.6)

Vertical Grinders

Cut-Off Tools



WX-5K-3011S

3" Cut-Off Tools

WX-5L-3011S

4" Cut-Off Tools

- Push Button Adjustable Guard
- 8 Position Adjustable Guard Swivel Guard
- Rear Exhaust
- 0.7 HP



WX-5K-3011B

3" Cut-Off Tools - Long Neck

WX-5L-3011B

4" Cut-Off Tools - Long Neck

- Push Button Adjustable Guard
- 8 Position Adjustable Guard Swivel Guard
- Rear Exhaust
- 0.7 HP



WX-5L-5200

4" Extended Cut-Off Tools

- Spindle Lock Design
- Rear Exhaust
- Built-in Cushion Grip
- Push to Adjust Guard
- 11 Position Adjustable Swivel Guard
- 1.0 HP



WX-5L-3011L

4" Extended Cut-Off Tools

- Push Button Adjustable Guard
- 8 Position Adjustable Guard Swivel Guard
- Rear Exhaust
- 0.7 HP



Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Disc Hole Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Horse Power HP (Kw)	Air Inlet (NPT)	Hose Size ID Inch (mm)
WX-5L-3011L	17,000	4 (100)	3/8 (10)	4 (113)	15-3/4 (400)	3.7 (1.7)	0.7 (0.52)	1/4"	3/8 (10)
WX-5K-3011B	17,000	3 (75)	3/8 (10)	4 (113)	12 (304)	3.1 (1.4)	0.7 (0.52)	1/4"	3/8 (10)
WX-5L-3011B	17,000	4 (100)	3/8 (10)	4 (113)	12 (304)	3.1 (1.4)	0.7 (0.52)	1/4"	3/8 (10)
WX-5K-3011S	17,000	3 (75)	3/8 (10)	4 (113)	10-1/2 (267)	2.6 (1.2)	0.7 (0.52)	1/4"	3/8 (10)
WX-5L-3011S	17,000	4 (100)	3/8 (10)	4 (113)	10-1/2 (267)	2.6 (1.2)	0.7 (0.52)	1/4"	3/8 (10)
WX-5L-5200/10	14,000	4 (100)	3/8 (10)	4 (113)	14-3/4 (377)	3.7 (1.7)	1.0 (0.7)	1/4"	3/8 (10)
WX-5L-5200/15	14,000	4 (100)	15 mm	4 (113)	14-3/4 (377)	3.7 (1.7)	1.0 (0.7)	1/4"	3/8 (10)
WX-5L-5200/16	14,000	4 (100)	5/8 (16)	4 (113)	14-3/4 (377)	3.7 (1.7)	1.0 (0.7)	1/4"	3/8 (10)

Features :

- Spindle Lock Design
- 8 Position Adjustable Swivel Guard
- Good for Grinding or Cutting
- Rear Exhaust



► 126° - 8 Position Adjustable Swivel Guard

WX-5B-3271

4" Angle Grinder & Cut-Off Tools

WX-5C-3271

4-1/2" Angle Grinder & Cut-Off Tools

WX-5D-3271

5" Angle Grinder & Cut-Off Tools



WX-52-3271

1/4" Angle Die Grinder



WX-5D-3272

5" Angle Grinder & Cut-Off Tools

- Spindle Thread : 5/8"-11

- Non-Swivel Guard



Model No.	Free Speed (RPM)	Disc Size Inch (mm)	Disc Hole Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Horse Power HP (Kw)	Air Inlet (NPT)	Hose Size ID Inch (mm)
WX-5B-3271	12,000	4 (100)	5/8 (16)	4 (113)	10-1/2 (267)	3.7 (1.7)	1.0 (0.7)	1/4"	3/8 (10)
WX-5D-3272	12,000	5 (125)	5/8 (16)	4 (113)	10-1/2 (267)	3.7 (1.7)	1.0 (0.7)	1/4"	3/8 (10)
WX-52-3271	12,000	5 (125)	5/8 (16)	4 (113)	10-1/2 (267)	3.7 (1.7)	1.0 (0.7)	1/4"	3/8 (10)

Cut-Off Tools



WX-5J-3011X
3" Cut-Off Tools



WX-5J-3011B
3" Cut-Off Tools



WX-5J-3011Z
3" Cut-Off Tools



WX-5J-3011Y
3" Cut-Off Tools



WX-5J-8424
3" Reversible Cut-Off Tools



WX-5J-5100
3" Cut-Off Tools



Model No.	Free Speed (RPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-5J-3011B	20,000	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
WX-5J-3011X	20,000	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
WX-5J-3011Y	20,000	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
WX-5J-3011Z	20,000	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
WX-5J-5100	20,000	1/4"	3/8 (10)	4 (113)	8 (203)	1.8 (0.8)	79
WX-5J-8424	20,000	1/4"	3/8 (10)	4 (113)	8-1/16 (204)	2 (0.9)	85

Cut-Off Tools


Cut-Off Tools



WX-5K-6200
3" Cut-Off Tools



WX-526
Cut-Off Tool
- Metal Guard

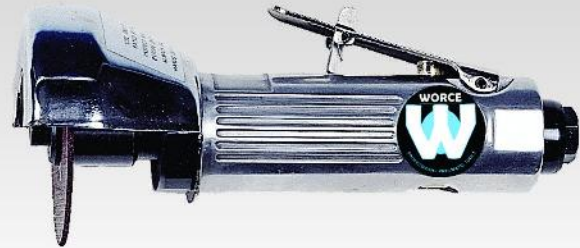

WX-586
3" Cut-Off Tool



WX-586A
3" Cut-Off Tool
- Swivel Guard



Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Disc Hole Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Horse Power HP (Kw)	Air Inlet (NPT)	Hose Size ID Inch (mm)
WX-526	20,000	3 (75)	3/8 (10)	4 (113)	7-5/16 (185)	1.8 (0.8)	-	1/4"	3/8 (10)
WX-586	22,000	3 (75)	3/8 (10)	4 (113)	7-1/2 (191)	1.8 (0.8)	-	1/4"	3/8 (10)
WX-586A	22,000	3 (75)	3/8 (10)	4 (113)	7-1/2 (191)	1.8 (0.8)	-	1/4"	3/8 (10)
WX-5K-6200	18,000	3 (75)	3/8 (10)	4 (113)	8-1/2 (216)	2.0 (0.93)	0.6 (0.45)	1/4"	3/8 (10)

Cut-Off Tools

Cut-Off Tools



Features :

- Reversible Lever
- Patented Hub
- Compact Disc Guard
- Safety Throttle Grip
- Built-in Cushion Grip
- Rotating Air Inlet



► Direction of Forward



► Direction of Reverse

WX-5265R

3" Reversible Cut-Off Tools



WX-5263R

3" Reversible Cut-Off Tools



WX-5265RK

Reversible Cut-Off Tools Kit



#51228

Double Ended
Spanner Wrench x 2



#10014

Hex Key Wrench x 1
(4.0 x 70L)



#52630

3" Cutting Wheel x 10



PK-SG2618

Safety Glasses x 1

Model No.	Free Speed (RPM)	Cutting Wheel Size Inch (mm)	Disc Hole Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Horse Power HP (Kw)	Air Inlet (NPT)	Hose Size ID Inch (mm)
WX-5263R	18,000	3 (75)	3/8 (10)	4 (113)	7-11/16 (195)	2 (0.9)	-	1/4"	3/8 (10)
WX-5265R	18,000	3 (75)	3/8 (10)	4 (113)	7-11/16 (195)	2 (0.9)	-	1/4"	3/8 (10)

Cut-Off Tools